
HELI

CDD16-D930/950/350

Forkover Electric Stacker

Load Curve

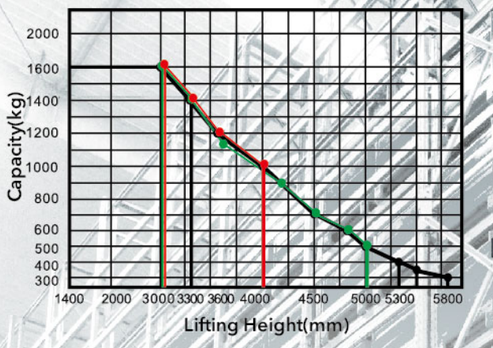

- CDD16-950
- CDD16-D930
- CDD16-350



AC | EPS

Down mode at 3speeds

Steering automatic deceleration

Truck automatically decelerates while at higher lifting position

Configuration and performance

- Electronic power steering system,light and low noise.
- Two-way magnetic valve,three drop speed mode.
- Drive unit floating bodies with patent design.
- AC Driving system,No carbon brush, free maintenance.
- Electromagnetic,regenerative braking system.
- Automatic lifting limit,proximity switch,long life.

Safety

- Curve automatic deceleration devices,more safe.
- Vehicle decelerates automatically at higher position.
- Stepless speed control system,safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.
- High position automatic reduction device.

Option

- Lithium battery


Type	Lift height (mm)	Mast type	Outside width between legs (mm)	Inside width between legs (mm)
CDD16-D930	1400/2000/2500/3000/3300/3600/4000	Standard 2-Stage	550/600/650/685	180/230/280/315
CDD16-950	3700/3900/4200/4500/4700/5000	Full Free 3-Stage		
CDD16-350	5300/5500/5800	Full Free 3-Stage		

CDD16-D930/950/350

Feature				
Model		CDD16	CDD16	CDD16
Configuration No.		D930	950	350
Type		Fork Over	Fork Over	Fork Over
Mast type		Standard 2-Stage	Full free 3-Stage	Full free 3-Stage
Load capacity	kg	1600	1600	1600
Load center	mm	600	600	600
Wheel base	mm	1325	1375	1375
Operating type		Walkie/Stand On		
Wheels				
Wheels type		PU	PU	PU
Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/2/4	1/2/4	1/2/4
Dimension				
Standard lift height	mm	1400/2000/2500/3000/3300/3600/4000	3700/3900/4200/4500/4700/5000	5300/5500/5800
Lowered fork height	mm	90	90	90
Fork size(length/width/thickness)	mm	1150(1220)/185/55	1150(1220)/185/55	1150(1220)/185/55
Overall length	mm	2050/2470	2105/2525	2105/2525
Overall width	mm	856	957	957
Max.extend height	mm	1900/2500/3000/3500/3800/4100/4500	4200/4400/4700/5000/5200/5500	5800/6000/6300
Mast lowered height	mm	1185/1535/1765/1980/2135/2335/2500	1800/1900/1985/2085/2135/2235	2520/2590/2690
Min.Turning radius	mm	1580/1990	1595/2010	1595/2010
Min.Aisle width for pallets 800×1200	mm	2180/2580	2230/2625	2230/2625
Min.Aisle width for pallets 1000×1200	mm	2210/2600	2260/2650	2260/2650
Mln.ground clearance	mm	30	30	30
Performance				
Travel speed,laden/unladed	km/h	6/6	6/6	6/6
Lift speed,laden/unladed	mm/s	130/180	130/180	130/180
Lowering speed,laden/unladed	mm/s	100/230	100/160	100/160
Gradeability,laden/unladed	%	6/8	6/8	6/8
Electrical configuration				
Drive motor/Lift motor/Steering motor	kW	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15
Brake		Electromagnetic/Regenerative		

Weight		Lead-acid battery	Lithium battery (Optional)	Lead-acid battery	Lithium battery (Optional)	Lead-acid battery	Lithium battery (Optional)
Battery voltage/Battery capacity	V/Ah	24/280	24/200	24/280	24/200	24/280	24/200
Controller		ZAPI	ZAPI	ZAPI	ZAPI	ZAPI	ZAPI
Battery weight	kg	235	99	235	99	235	99
Service weight with battery	kg	1213	1109	1585	1388	1649	1468

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

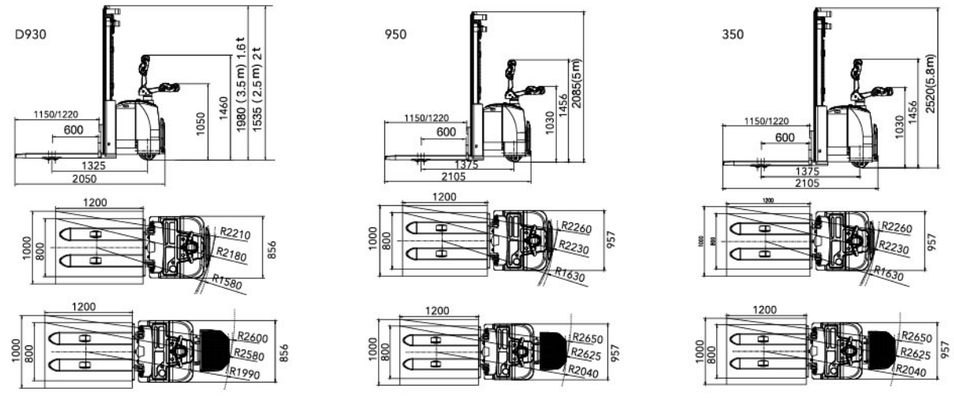

ANHUI HELI CO., LTD.

AUTHORIZED DEALER

Catalog No.201124 Fokeli Print

Forklift

Техническая документация HELI / CHL

Контакты продавца

+7 (495) 159-44-32

zakaz@kupit-shtabeler.ru

kupit-shtabeler.ru

Москва, Дорожная улица, 3к6

Каталог HELI CDD16-D930/950/350

Сохранены исходные технические страницы. Документ относится к серии и не является паспортом отдельной машины. Комплектацию поставки смотрите в карточке товара.

Типовая кислотная АКБ каталога: 24 В/280 А·ч. Предлагаемая АКБ: 24 В/210 А·ч; комплектацию смотрите в карточке товара.